


INSTRUCTION SHEET HEDGE CLIPPER BLADE BOLT KIT 90203


| ECHO Models | Serial Number Range |
|----------------------|---------------------|
| HCA-2620 | |
| SHC-225 | |
| SHC-2620 | |
| SHC-2620S | |
| ECHO PAS Attachments | |
| 99944200486 | |
| 99944200596 | All |
| 99944200640 | All |
| Shindaiwa Models | |
| AH262 | |
| AHS262 | |
| Shindaiwa M-Tools | |
| 66003 | |
| 66005 | |

Hedge Clipper Blade Bolt Kit 90203

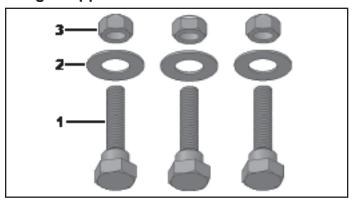

| NO. | PART NUMBER | QTY. | DESCRIPTION |
|-----|-------------|------|------------------------------|
| _ | 90203 | 1 | HEDGE CLIPPER BLADE BOLT KIT |
| 1 | V203002360 | 3 | +BOLT, SHOULDER M5×0.8 |
| 2 | V306000570 | 3 | +WASHER, CIRCULAR |
| 3 | V263000480 | 3 | +NUT M5×0.8 |

Install Hedge Clipper Blade Bolt Kit 90203 only on non-adjustable hedge trimmer blades with blade gap (location A) surface wear greater than 0.5 mm (0.020 in.).

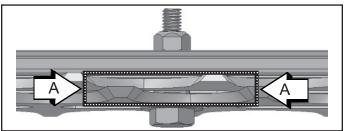


Installation Procedure

WARNING

Hedge trimmer blades are very sharp, touching them may lead to severe personal injury. Avoid touching blades whenever possible, and always wear gloves to protect hands.

- 1. Remove three existing nuts (B), spacers (C), washers (D), and bolts (E) from the blade assembly. Discard the parts.
- 2. Install new shoulder bolts with washers through bottom blade (A), then tighten the bolts. Install and tighten new nuts.

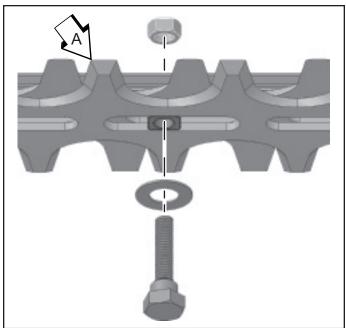

3. Hold the lock nut and loosen the bottom spacer bolt 1/2 turn counterclockwise to allow for blade clearance. Keep blade gaps a minimum of 0.127 - 0.20 mm (0.005 - 0.08 in.) for best cutting performance.